


# Uncoated Steel – Cold Rolled

## Data Sheet



April 2019. This literature supersedes all previous issues

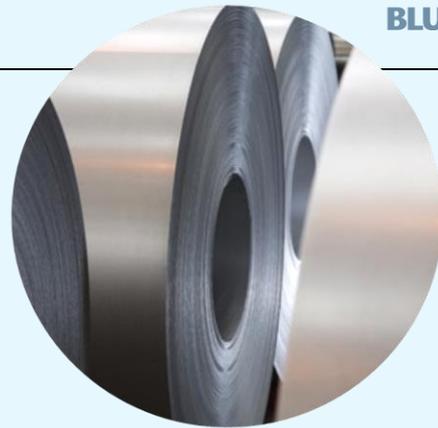

# CA1010H-E steel

### General Description

Cold-rolled steel, supplied in the as-rolled full-hard condition with a double sided exposed surface standard

### Typical Uses

Bearings, hardened washers and bushes

### Australian and International Standards

AS/NZS 1365: 1996

ISO 9001: 2015 Quality System Certified

### Guaranteed properties of steel base

Mechanical properties	Guaranteed value
Yield Strength, MPa (transverse tensile)	-
Tensile Strength, MPa (transverse tensile)	-
Elongation on 80mm	-
Hardness HRB	-
180° Transverse Bend (L axis)	2 t

### Chemical composition of steel base

Chemical properties	Guaranteed range or maximum %
Carbon - C	0.08 – 0.13
Silicon - Si	0.03
Manganese - Mn	0.30 – 0.60
Phosphorus - P	0.03
Sulphur - S	0.02
Aluminium – Al	0.01 – 0.08

### Dimensional capabilities

Thickness range (mm)	Maximum Width (mm)
1.40 – 3.00	960

Notes: Not every combination of thickness and width may be available. Supply conditions may be subject to dimensional restrictions and are subject to BlueScope Sales and Marketing confirmation. Slitting and shearing available on request from BlueScope Sales Offices. For requirements outside the standard product range please contact your local Sales Office.

### Supply conditions

Attribute	Normal	Optional
Surface Condition	As-Cold Rolled	-
Surface Treatment	Oiled	Not Oiled
Branding	Not Branded	-
Tolerance - Dimensions	Class A	-
Tolerance - Flatness	Class A	-
Edge Condition	Mill Edge	Trimmed Edge

Important Notes: Optional supply conditions may be subject to dimensional restrictions

### Fabricating performance

Method	Rating
Bending	1
Drawing	NR
Pressing	NR
Roll Forming	NR
Welding (design must allow for some strength reduction near welds)	5
Painting Pre-treatment	5

Where: 1 = Limited to 5 = Excellent or NR = Not Recommended

The ratings in this table are general indicators only, given as a guide to fabricating performance.

### Important information

Material should be used promptly to avoid the possibility of a storage related corrosion. Oiling improves corrosion resistance, but oiled product should be used within three months.

**steel.com.au**

To ensure you have the most current Data Sheet

**1800 024 402**

[steeldirect@bluescopesteel.com](mailto:steeldirect@bluescopesteel.com)

For more information contact Steel Direct



The information contained in this datasheet is provided by way of general information about this product only, and has not been prepared with your specific needs in mind. We recommend that you seek BlueScope's advice as to the suitability of this product for the purpose(s) for which you propose to use it. To contact BlueScope for advice about your proposed use of this product, please contact Steel Direct. BlueScope and the BlueScope brand mark are registered trade marks of BlueScope Steel Limited. © 2019 BlueScope Steel Limited ABN 16 000 011 058. All rights reserved.